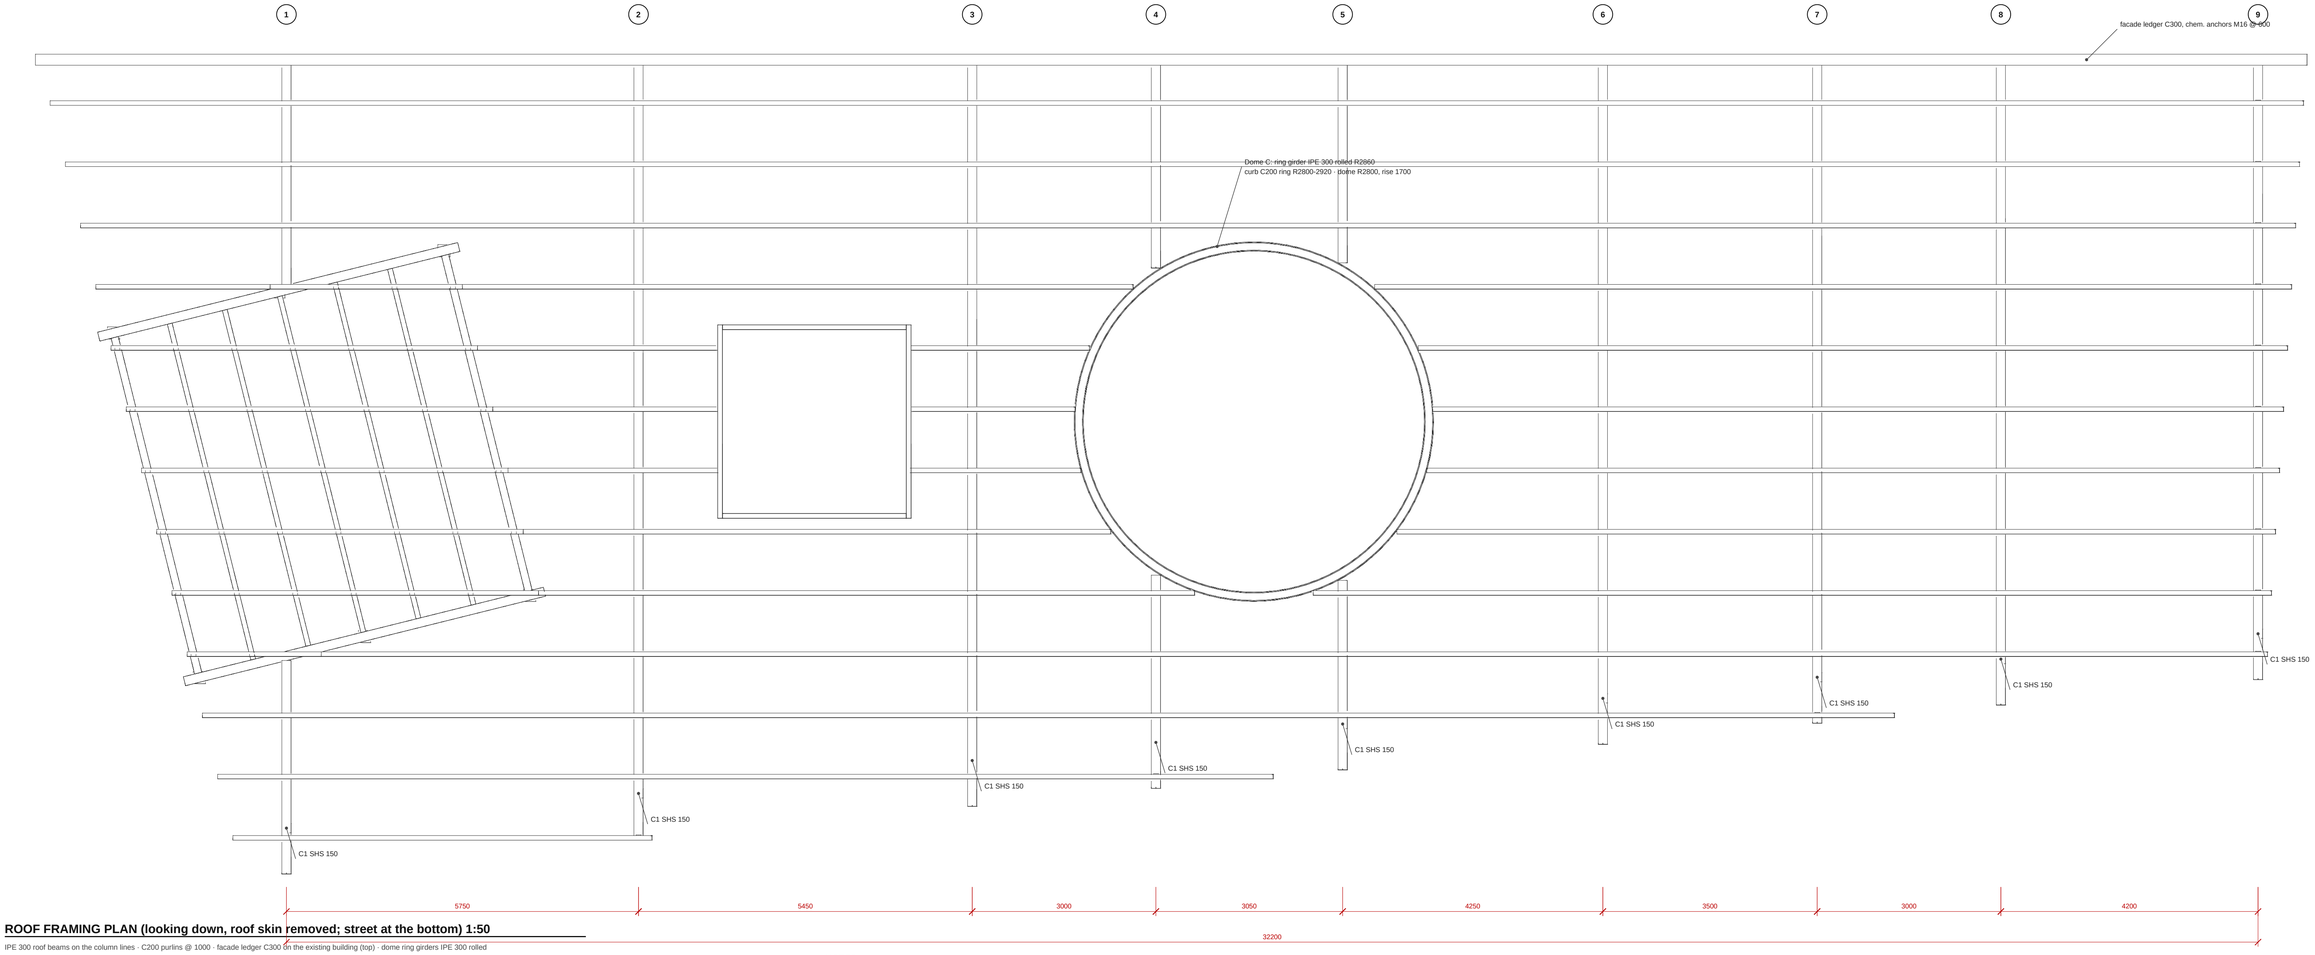


ROOF FRAMING PLAN (looking down, roof skin removed; street at the bottom) 1:50

IPE 300 roof beams on the column lines · C200 purlins @ 1000 · facade ledger C300 on the existing building (top) · dome ring girders IPE 300 rolled

Mark	Member	Section	Qty	Total length / note
C1	Column	SHS 150x150x8, S355	7	TER to beam underside; 2 more encased in the portal pylons
B1	Roof beam	IPE 300, S355	11	93.4 m (cut at the dome girder)
P1	Purlin	C200x75x20x2.5 galv.	19	~382 m (trimmed at the dome; continuous under the skylight)
R1	Dome ring girder	IPE 300 rolled (minor axis)	1	R2860
R2	Drum curb	C200 rolled ring	1	carries the drum studs + roof skin edge
S1	Skylight frame	alu 80 upstand + EPDM, glass 8+8	1	3.0 x 3.0 m over the chinar, on purlins P1; panjara hung below
L1	Facade ledger	C300, chem. anchors M16@600	1	37.1 m
K1	Purlin cleat	L80x80x8, 2xM12	93	at every purlin / beam crossing

NOTES

Roof: Klip-Lok standing-seam sheet on clips + 50 mm foil-faced insulation on the purlins, fall 3.5 % (2°) to the street gutter, one sheet length, no end laps (box gutter 250 wide on the street edge, outlets every 6 m).

Beams IPE 300 bear on the facade ledger (end plate 10 mm, 4xM16 8.8) and on the columns (cap plate 15 mm, 4xM16). At the domes the beams frame into the ring girders (fin plate 10 mm, 3xM16).

Ring girders IPE 300 rolled about the minor axis, 4 splices each (full-strength end plates), set in the 3.5 % roof plane; drum curb C200 ring welded on top.

Columns SHS 150x150x8 on base plates 300x300x20, 4 chemical anchors M20 into the slab; clad by the majolica columns (sheet S-04).

All steel: blast Sa 2.5, zinc-rich primer + 2 coats, colour RAL 8019 (exposed). Fire / structural check by the local engineer before fabrication.

SAMARKAND — Uzbek / Tajik restaurant terrace · 254 Vo Nguyen Giap, Da Nang

Roof framing plan — steel structure, dome ring girders

Drawn from the 3D model (closed-shell, QA-clean); dimensions in mm, levels in m from the finished terrace floor ±0.000

Sheet S-01 Rev R12-v8.3 2026-11-04 A1 Construction set — verify on site before fabrication