SAMARKAND


Terrace roof · concept

Roof plan 1:200 · sections 1:100

R12


2026-11-04

ROOF PLAN · 1:200

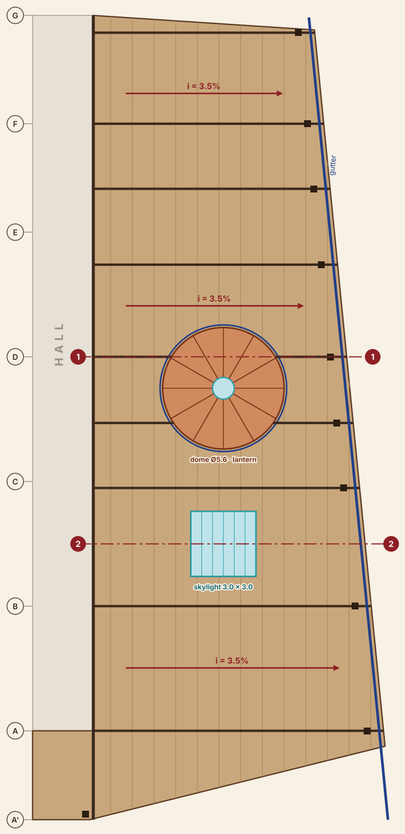


N

SECTION 1–1 (on axis D, through the central dome) · 1:100

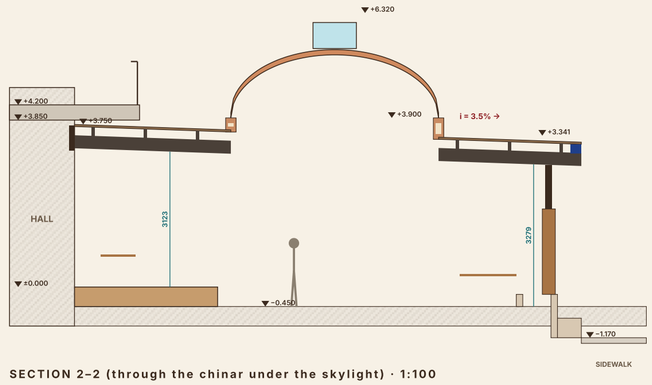

SECTION 2–2 (through the chinar under the skylight) · 1:100

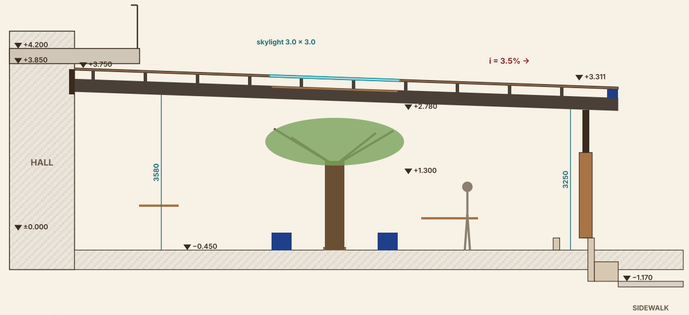

SOLUTION

- Beams: galvanised steel, dark-bronze powder coat, on the column lines at 3.0–5.75 m
- Façade bearing: steel ledger on anchors under the balcony slab (soffit +3.850)
- Street bearing: 9 columns 150×150 in the planter wall, wood-clad; cap +2.9
- C200 purlins at 1.2 m; 50 mm PU sandwich panel with a wood-look underside
- 3.5% fall to the street (Klip-Lok standing-seam sheet, one length, insulated); box gutter along the street, downpipes inside the columns → planter drain
- One dome — the central Ø5.6 with a glazed lantern. Over the chinar by the bar a 3.0 × 3.0 m skylight: toughened laminated glass on the purlins in the roof plane (3.5% fall), aluminium frame with EPDM, carved panjara grille below; the tree stays under the roof, crown trained. The north chinar is removed
- Dome: 12 bent ribs 100×50 on a level ring at +3.900, drum with jali windows (light + hot-air exhaust), GRC girih brick-slip panels inside, terracotta skin on a membrane outside
- Timber slat ceiling only over the bar and the corridor (accent)
- Wave louvers under the balcony removed; the F2 façade stays open
- Typhoon: wind zone II, uplift anchorage; structural engineer to calculate

QUANTITIES

Roof area	**412.9 m²**
Skylight (glass)	**9.0 m²**
Beams (lin. m)	**105.2 m**
Purlins (lin. m)	**381.8 m**
Columns	**11 pcs**
Street gutter	**37.2 m**
Dome ø5.6 · lantern	**36.2 + 6.3 m² · 37.1 m**