
SECTION A-A THROUGH THE CENTRAL DOME 1:25

karbandi interior shell hung from the steel ribs · lantern · chandelier

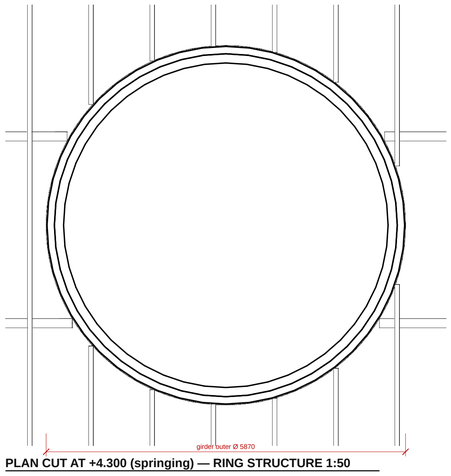

PLAN CUT AT +4.300 (springing) — RING STRUCTURE 1:50

ring beam + drum cut; curb, ring girder, beams and purlins below

BUILD-UP & ASSEMBLY SEQUENCE

1. Erect the ring girder (IPE 300 rolled, 4 segments) on temporary props; bolt the beam fin plates; check level against the 5 % roof plane.
2. Weld the C200 curb ring on the girder top flange; fix SHS 60 drum studs @ 600 (base plates 8 mm, 2xM12) and the top ring UPN 240 at +4.350.
3. Set the 12 rolled T80 ribs from the ring beam to the lantern ring (CHS 1016x10), bolted 2xM16 each end; 2 hoops L60 (support the inner shell).
4. Hang the karbandi GRG / FRP interior panels (moulds from the 3D file) on M10 rods from ribs and hoops; fill joints, paint the pattern.
5. Close the shell: FRP segments (moulded ribbed pattern, UV gelcoat) through-bolted to the ribs, sealed joints; lantern glazing, copper cap, finial.
LIGHTWEIGHT DOME: ≈ 1.5–2 t total vs ≈ 5 t with GRC + tiles. Heavy GRC option = alternative only. Typhoon uplift fixing by the engineer.
6. Drum facing (kufic glazed brick), LED cove in the ring beam, chandelier hook test-loaded to 2 × SWL before hanging.

SAMARKAND — Uzbek / Tajik restaurant terrace · 254 Vo Nguyen Giap, Da Nang

Central dome C — section, ring plan, build-up

Drawn from the 3D model (closed-shell, QA-clean); dimensions in mm, levels in m from the finished terrace floor ±0.000

Sheet S-02 Rev R12-v8 2026-10-27 A1 Construction set — verify on site before fabrication