
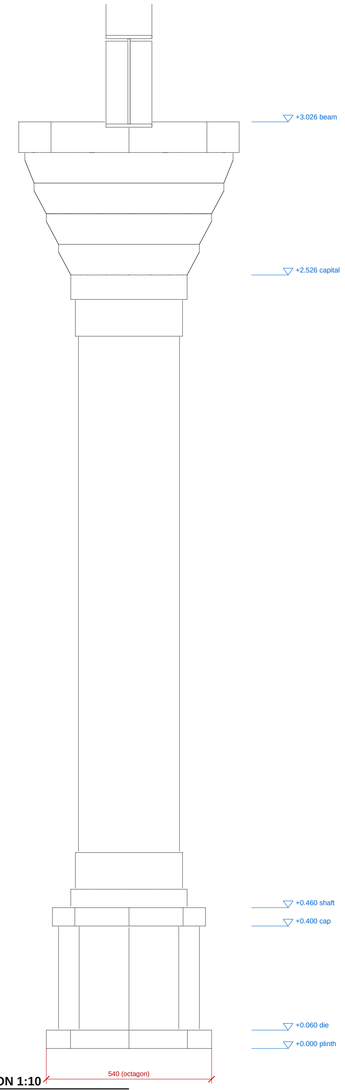



ELEVATION 1:10

view from the street

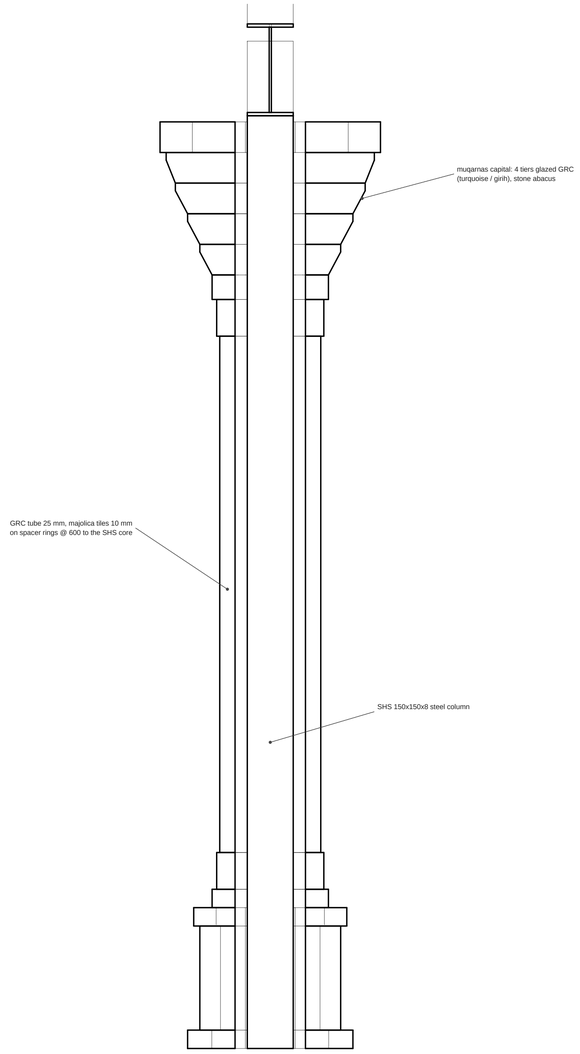

SECTION 1:10

steel core and cladding layers

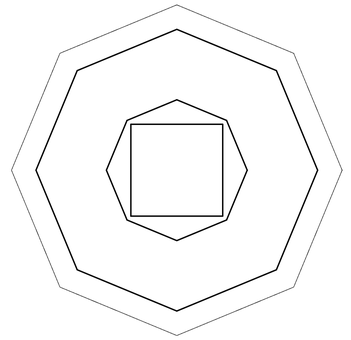

PLAN AT +0.200 1:5

octagonal stone plinth around the base plate

PLAN AT +0.200 1:5

octagonal stone plinth around the base plate

NOTES

Plinth: limestone octagon 540 across, 3 courses (60 / 340 / 60), dowelled to the slab, open core around the base plate (grout after levelling).
Shaft: 2 GRC half-shells per storey, mechanically fixed to spacer rings; joints on the column axis; tiles: Samarkand cobalt majolica + kufic bands.
Capital: 4 GRC tiers (100 mm each) stepping 40 mm, glazed; stone abacus 720 octagon under the beam (20 mm clear above the sloped flange).
Columns inside the street portal pylons are encased by the pylon brickwork (S-05).

SAMARKAND — Uzbek / Tajik restaurant terrace · 254 Vo Nguyen Giap, Da Nang

Majolica column — cladding of the steel columns

Drawn from the 3D model (closed-shell, QA-clean); dimensions in mm, levels in m from the finished terrace floor ±0.000

Sheet S-04 Rev R12-v5 2026-10-27 A1 Construction set — verify on site before fabrication