SAMARKAND


Terrace roof · concept

Roof plan 1:200 · sections 1:100


R12

2026-10-28


ROOF PLAN · 1:200

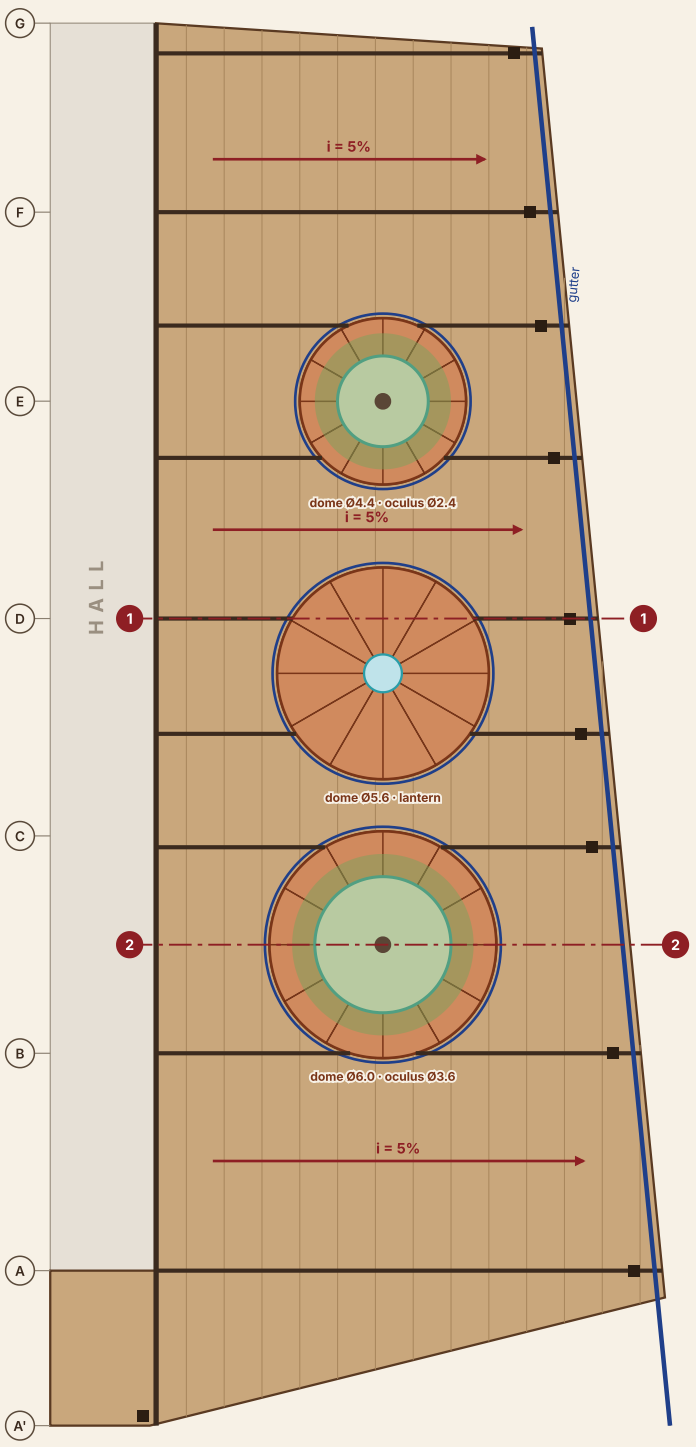

SECTION 1–1 (on axis D, through the central dome) · 1:100

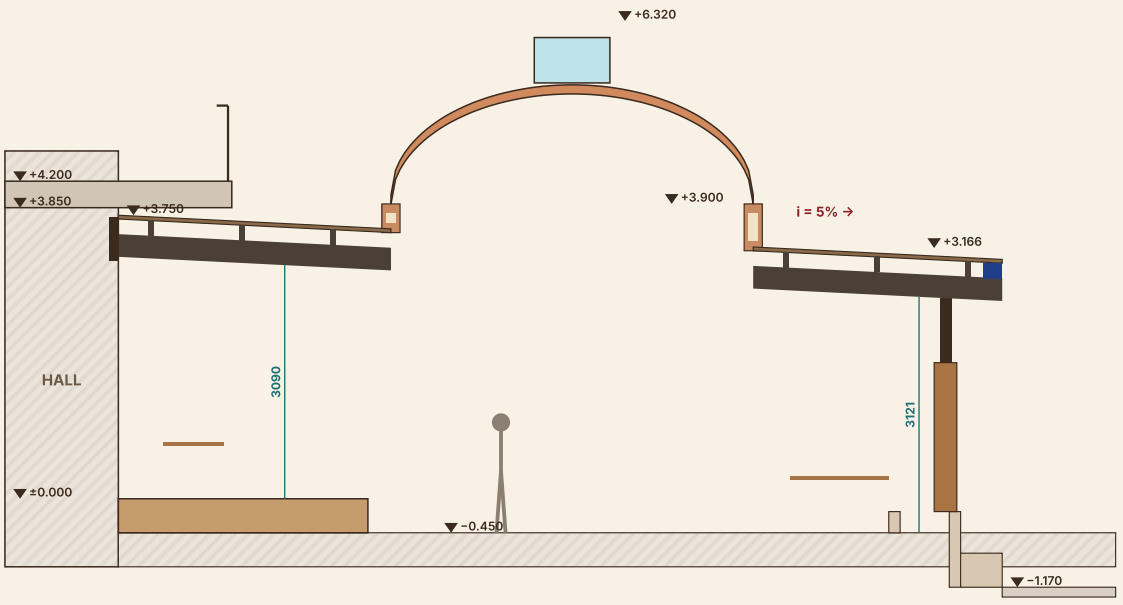

SECTION 2–2 (through the south chinar dome) · 1:100

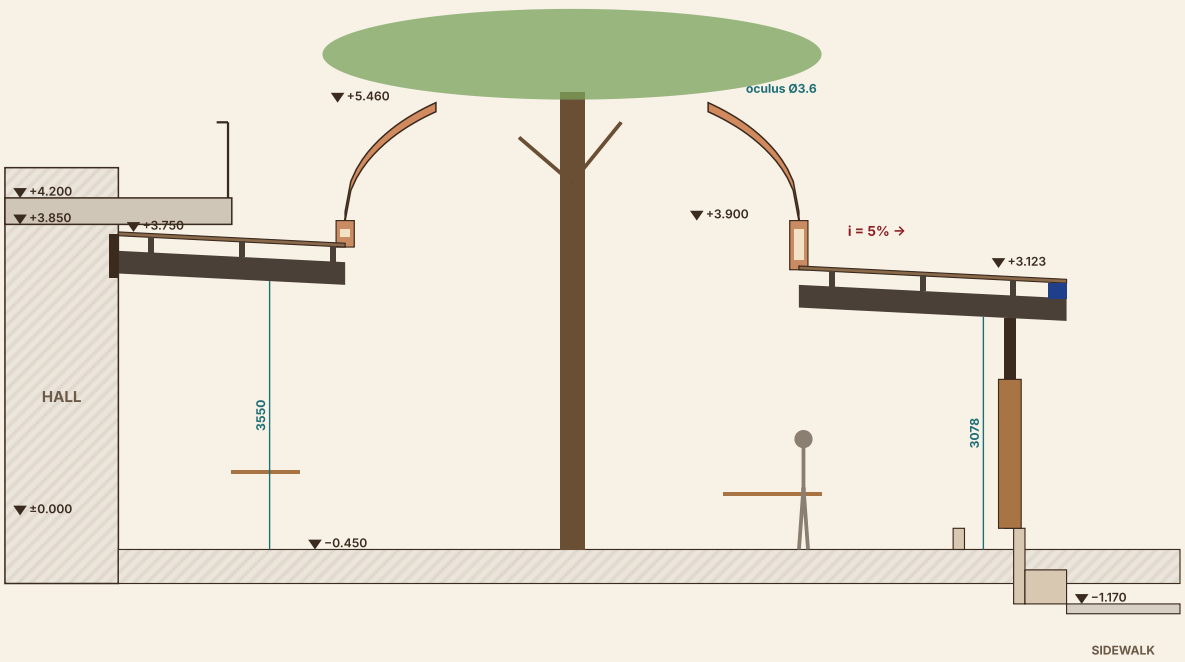

SOLUTION

- Beams: galvanised steel, dark-bronze powder coat, on the column lines at 3.0–5.75 m
- Façade bearing: steel ledger on anchors under the balcony slab (soffit +3.850)
- Street bearing: 9 columns 150×150 in the planter wall, wood-clad; cap +2.9
- C200 purlins at 1.2 m; 50 mm PU sandwich panel with a wood-look underside
- 5% fall to the street; box gutter along the street, downpipes inside the columns → planter drain
- Domes: over the chinars Ø6.0 and Ø4.4 with an open oculus Ø3.6 / Ø2.4 (the crown grows out, rain falls into the tree pit); a closed Ø5.6 dome with a glazed lantern between them
- Dome: 12 bent ribs 100×50 on a level ring at +3.900, drum with jali windows (light + hot-air exhaust), GRC girih brick-slip panels inside, terracotta skin on a membrane outside
- Timber slat ceiling only over the bar and the corridor (accent)
- Wave louvers under the balcony removed; the F2 façade stays open
- Typhoon: wind zone II, uplift anchorage; structural engineer to calculate

N

QUANTITIES

Roof area	**378.4 m²**
Oculi (open)	**14.7 m²**
Beams (lin. m)	**105.2 m**
Purlins (lin. m)	**338.7 m**
Columns	**11 pcs**
Gutter street / courts	**37.2 / 18.8 m**
Dome ø6.0 · oculus ø3.6	**31.6 + 8.5 m² · 28.0 m**
Dome ø5.6 · lantern	**36.2 + 7.9 m² · 37.1 m**
Dome ø4.4 · oculus ø2.4	**17.9 + 6.2 m² · 21.3 m**